

Model: 40311V – 40314V – 40315V – 40316V series



A Moen Incorporated Brand



Trims for Pressure Balancing Volume Control In-Wall Valve

DESCRIPTION

- Metal construction with chrome plated or LifeShine® Brushed Nickel finishes
- 40316V – valve only trim
- 40315V – shower only trim
- 40314V – tub/shower trim w/ IPS tub spout
- 40311V – tub/shower trim w/ slip fit tub spout
- Twelve (12) individual boxes per master carton

OPERATION

- Rotating style metal lever handle
- Temperature control by 120° arc
- Will operate with less than 5 lbs of torque
- Metal escutcheon features back printed polycarbonate overlay with red/blue international temperature marking
- Protective gaskets surround interior and exterior rim
- Weep hole located at bottom of escutcheon
- Slip fit tub spout connects to 1/2" pipe with bottom 5/32" set screw
- IPS tub spout connects to 1/2" mips pipe

FLOW

- Showerhead limited to 2.5 gpm (9.5 L/min) MAX

IN-WALL VALVE SOLD SEPARATELY

- 45511 CC/Male IPS with stops
- 45512 CC/Male IPS
- 45514 PEX connections


STANDARDS

- Third party certified to CSA B125, ASME A112.18.1, ANSI A117.1, IAPMO, and all applicable requirements referenced therein, California Proposition 65, Illinois, Massachusetts, and Texas
- All CFG products are compliant to all plumbing codes that require 3rd party certification to the applicable plumbing/fitting standards
- Features red/blue hot/cold temperature indicators

WARRANTY – RESIDENTIAL, COMMERCIAL

- Ten (10) year limited warranty against defects in materials and manufacturing workmanship
- Refer to the installation instructions enclosed with each CFG product or call 1-888-450-4910 for complete warranty information

CRITICAL DIMENSIONS

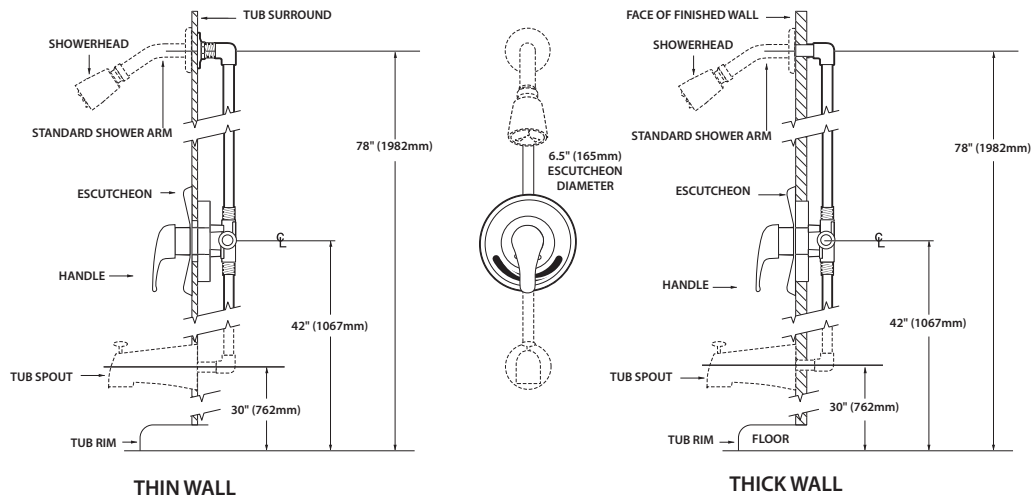

THIN WALL

THICK WALL